


INSTALLATION

- RGB AQUAFLEX • RGB STARFLEX • RGB EDGE • RGB AQUA EDGE • RGB LINEARFLEX • RGB SUPER NEON X • RGB ZILVA • RGBW AQUAFLEX
- RGBW STARFLEX • AQUAFLEX DYNAMIC WHITE • STARFLEX DYNAMIC WHITE

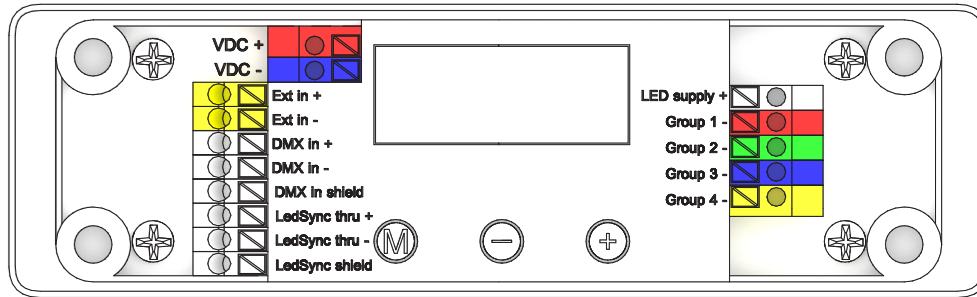

RGB PRODUCTS

Setting mode of operation:	Setting LED group:	DMX address:	Network resolution:	Visual test run:	Factory defaults:
Press M for 3 seconds	Press M + +	Press M	Press M twice	Press M + + + -	Press M + + + -
SET MODE will display	LED will display	DMX ADDR will display	NETW RES will display	TEST will display	RESET PRES MENU
Use + , - to select DMX	Use + , - to select RGB	Use + , - to select 1 or 5	Use + , - to select 8 BT	LD180 will begin a visual test to confirm wiring	will display
Press M to set	Press M 3x to set	Press M 3x to set	Press M 2x to set		Press M to restore

RGBW PRODUCTS

Setting mode of operation:	Setting LED group:	DMX address:	Network resolution:	Visual test run:	Factory defaults:
Press M for 3 seconds	Press M + +	Press M	Press M twice	Press M + + + -	Press M + + + -
SET MODE will display	LED will display	DMX ADDR will display	NETW RES will display	TEST will display	RESET PRES MENU
Use + , - to select DMX	Use + , - to select RGBW	Use + , - to select 1 or 5	Use + , - to select 8 BT	LD180 will begin a visual test to confirm wiring	will display
Press M to set	Press M 3x to set	Press M 3x to set	Press M 2x to set		Press M to restore

DYNAMIC WHITE PRODUCTS

Setting mode of operation:	Setting LED group:	DMX address:	Network resolution:	Visual test run:	Factory defaults:
Press M for 3 seconds	Press M + +	Press M	Press M twice	Press M + + + -	Press M + + + -
SET MODE will display	LED will display	DMX ADDR will display	NETW RES will display	TEST will display	RESET PRES MENU
Use + , - to select DMX	Use + , - to select CCWW	Use + , - to select 10	Use + , - to select 8 BT	LD180 will begin a visual test to confirm wiring	will display
Press M to set	Press M 3x to set	Press M 3x to set	Press M 2x to set		Press M to restore

All MODA LIGHT products should be installed by a Licensed Electrician to local & national code. Do not modify, adapt or cut any MODA LIGHT components, plugs or accessories. Any modifications will void the warranty and may create a potential safety hazard. Do not put on the same circuit as inductive loads. Incorrect wiring will result in irreparable permanent damage to the LEDs and fixture. MODA LIGHT tests all products before shipping, and will not replace items that have been destroyed by incorrect wiring or handling. Ensure electrical circuit is switched off before wiring. See MODA LIGHT terms and conditions for product limited warranty.