


SPECIFICATION

DMX 512 Controller Interface:

Wall mounted DMX 512 controller. Glass faceplate with touch sensitive display allows for easy control of up to 500 scenes across 10 zones. Built in two DMX universes. Easily control colors, dimming, speed and color scenes with a simple touch. Connect to a computer, smart phone or a iPad / Android device to program your own color scenes or use as a remote device with a WiFi and internet connection.



Dimensions:

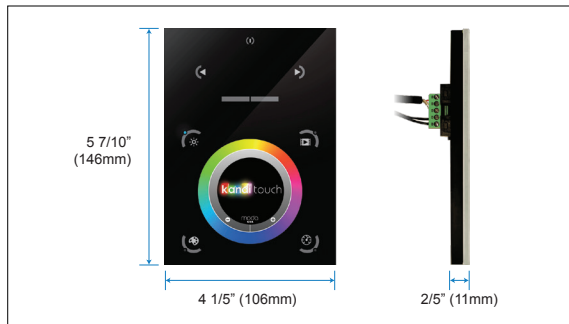

Specifications:

Components	Interface, SD-Card, Wall Plate, CD-Rom, USB Cable, Power Supply
Software	ESA + ESA PRO on PC/Windows, ESA2 on PC + Mac
Mobile App's	DMX Lightpad 3 + ARCOLIS on iPhone/ iPad/ Android
Color Options	Black Frame With Either White or Black Glass Faceplate
Standards	EC, EMC, RoHS, ETL, UL
Temperature	14°F ~ 113°F (-10°C ~ 45°C)
Dimensions	Length 4 1/5" (106mm) Width 5 7/10" (146mm) Height 2/5" (11mm)
Weight	8.71 oz (247g)

Options:

Product Name	Finish
KND-TCH	B - Black W - White

Ordering:

Sample SKU:	KND-TCH-B
-------------	-----------

Features:

Power Supply	6v DC (0.6A)
Dmx Output #1	First Universe, 512 Channels DMX 512 Output
Dmx Output #2	Second Universe, 512 Channels DMX 512 Output
USB	USB Communication For PC/Mac Software
Ethernet	Advanced Networking Features
Ports 1,2,...,8	8 Contact Closure Inputs, Connects To Ground For Operating
User Interface	10 Button, 1 Wheel, 1 Color Display, 5 LED's (Touch Sensitive Keypad)
SD Card	Micro SD Card For Stand Alone Memory Use (Supplied)
RS232	RS232 Serial Communication For External Synchronisation
Output Relay	Automatic Standby 5v Signal
Clock	Real-Time Clock And Calendar

Accessories:

RJ2BLOCK	RJ45 to connector block converter for POWER + DMX
----------	---

Project Name:				
Notes:				