
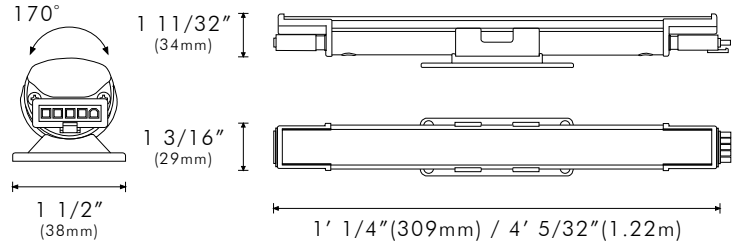


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____



PHYSICAL

Dimensions	1ft 1/4in (309mm) / 4ft 5/32in (1.22m)
Weights	1ft: 0.38 lbs (0.17kg)/ 4ft: 1.22 lbs (0.55 kg)
Applications	Cove, Accent, & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~70°C)
Humidity	20-70% Non Condensing

OUTPUT

Colors	Dynamic Cool (3500K - 6500K)
Beam Angle	200°
CRI	95-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

SPECIFICATIONS

	Lumens per ft	Efficacy
DYNAMIC COOL 1FT	480.60	96.12
DYNAMIC COOL 4FT	1922.40	101.17

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	DMX 512
Power Factor	≥ 0.98

POWER CONSUMPTION

	120V AC	240V AC	277V AC
1 Foot	5W	6.5W	6.5W
4 Foot	19W	20W	20W

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
	120 ft	240 ft	240 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

FIXTURE		SKU
1FT	Moda Mini Cove Interior Standard Output Silver DMX 512 Dynamic Cool HCRI 1FT	MMCI-S-Sx-S-DCH-1
4FT	Moda Mini Cove Interior Standard Output Silver DMX 512 Dynamic Cool HCRI 4FT	MMCI-S-Sx-S-DCH-4

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	MLCI-US-5PIN-W-10FT
Leader Cable US 5 Pin 25ft	Power to first fixture of run	MLCI-US-5PIN-W-25FT
Jumper Cable US 5 Pin 1ft	Connection between fixtures	MJCI-US-5PIN-W-1FT
Jumper Cable US 5 Pin 4ft	Connection between fixtures	MJCI-US-5PIN-W-4FT
Leader Cable EU 5 Pin 3m	Power to first fixture of run	MLCI-EU-5PIN-W-3M
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	MLCI-EU-5PIN-W-7.62M
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	MJCI-EU-5PIN-W-300MM
Jumper Cable EU 5 Pin 1m	Connection between fixtures	MJCI-EU-5PIN-W-1M
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G