


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

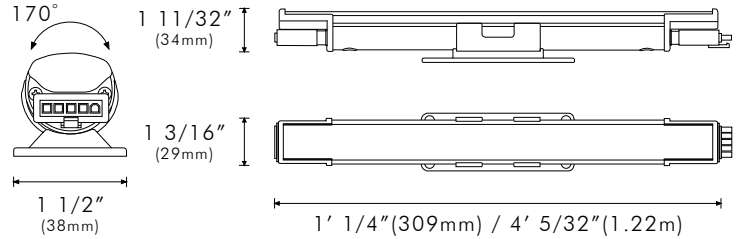

PHYSICAL

Dimensions	1ft 1/4in (309mm) / 4ft 5/32in (1.22m)
Weights	1ft: 0.38 lbs (0.17kg)/ 4ft: 1.22 lbs (0.55 kg)
Applications	Cove, Accent, & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~70°C)
Humidity	20-70% Non Condensing

OUTPUT

Colors	Dynamic Warm (1800K - 3000K)
Beam Angle	200°
CRI	95-97
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

SPECIFICATIONS

	Lumens per ft	Efficacy
DYNAMIC WARM 1FT	353.60	70.72
DYNAMIC WARM 4FT	1414.40	74.44

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
	120 ft	240 ft	240 ft

POWER CONSUMPTION

	120V AC	240V AC	277V AC
1 Foot	5W	6.5W	6.5W
4 Foot	19W	20W	20W

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

FIXTURE		SKU
1FT	Moda Mini Cove Interior Standard Output Silver DMX 512 Dynamic Warm HCRI 1FT	MMCI-S-Sx-S-DWWH-1
4FT	Moda Mini Cove Interior Standard Output Silver DMX 512 Dynamic Warm HCRI 4FT	MMCI-S-Sx-S-DWWH-4

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	MLCI-US-5PIN-W-10FT
Leader Cable US 5 Pin 25ft	Power to first fixture of run	MLCI-US-5PIN-W-25FT
Jumper Cable US 5 Pin 1ft	Connection between fixtures	MJCI-US-5PIN-W-1FT
Jumper Cable US 5 Pin 4ft	Connection between fixtures	MJCI-US-5PIN-W-4FT
Leader Cable EU 5 Pin 3m	Power to first fixture of run	MLCI-EU-5PIN-W-3M
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	MLCI-EU-5PIN-W-7.62M
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	MJCI-EU-5PIN-W-300MM
Jumper Cable EU 5 Pin 1m	Connection between fixtures	MJCI-EU-5PIN-W-1M
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G