


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

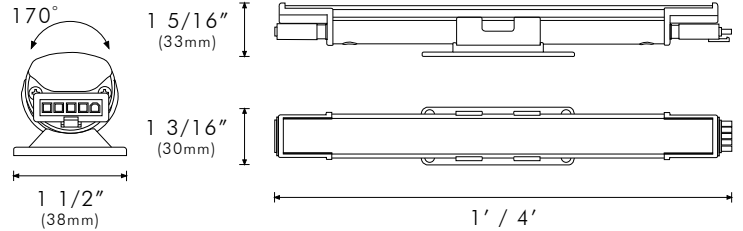

## PHYSICAL

<b>Lengths</b>	1ft (304mm) / 4ft (1.22m)
<b>Applications</b>	Cove, Accent & Indirect General Illumination
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
<b>Ingress Protection</b>	Dry/Damp Location IP52
<b>Thermal Management</b>	Moda Aluminum Heat Sink
<b>Fixture Connections</b>	Integral Male & Female Connectors
<b>Operating Temperature</b>	-40°F ~ 122°F (-40°C ~ 50°C)
<b>Storage Temperature</b>	-40°F ~ 176°F (-40°C ~ 80°C)
<b>Humidity</b>	0-95% Non Condensing

## SPECIFICATIONS

	<b>Lumens</b>	<b>Efficacy</b>
1FT 0-10V	447.40	104.04
4FT 0-10V	1789.60	102.26

## POWER CONSUMPTION

	<b>120V AC</b>	<b>277V AC</b>
<b>1 Foot</b>	5W	6.5W
<b>4 Foot</b>	19W	20W

## MAX RUN LENGTHS

	<b>120V AC</b>	<b>277V AC</b>
<b>SO</b>	120 ft	240 ft
<b>HO</b>	50 ft	100 ft

## OUTPUT

<b>CCTs</b>	2700K to 1800K 3500K to 2200K
<b>Beam Angle</b>	200°
<b>CRI</b>	98
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Single Bin
<b>Lumen Maintenance</b>	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	0-10V
<b>Power Factor</b>	≥ 0.98

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
<b>Class</b>	1
<b>Warranty</b>	5 Year Limited Warranty

	NAME	SKU
0-10V 1FT	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 1FT	MMCI-S-Sx-S-0-GDH-1
	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 1FT	097-1025-xx
0-10V 4FT	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 4FT	MMCI-S-Sx-S-0-GDH-4
	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 4FT	097-3025-xx

## ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.