


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

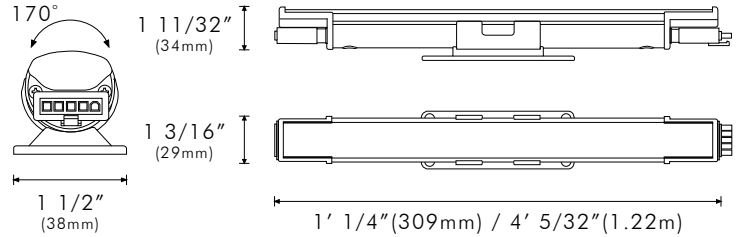

PHYSICAL

Dimensions	1ft 1/4in (309mm) / 4ft 5/32in (1.22m)
Weights	0.21 lbs (0.10 kg) / 4ft: 0.38 lbs (0.17kg)
Applications	Cove, Accent, & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)
Humidity	20-70% Non Condensing

OUTPUT

CCTs	2700K to 1800K 3500K to 2200K
Beam Angle	200°
CRI	98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

SPECIFICATIONS

	Lumens per ft	Efficacy
1FT 0-10V	447.40	104.04
4FT 0-10V	1789.60	102.26

POWER CONSUMPTION

	120V AC	240V AC	277V AC
1 Foot	5W	6.5W	6.5W
4 Foot	19W	20W	20W

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
SO	120 ft	240 ft	240 ft
HO	50 ft	100 ft	100 ft

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

FIXTURES	SKU
0-10V 1FT Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 1FT	MMCI-S-Sx-S-0-GDH-1
Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 1FT	097-1025
0-10V 4FT Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 4FT	MMCI-S-Sx-S-0-GDH-4
Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 4FT	097-3025

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	MLCI-US-5PIN-W-10FT
Leader Cable US 5 Pin 25ft	Power to first fixture of run	MLCI-US-5PIN-W-25FT
Jumper Cable US 5 Pin 1ft	Connection between fixtures	MJCI-US-5PIN-W-1FT
Jumper Cable US 5 Pin 4ft	Connection between fixtures	MJCI-US-5PIN-W-4FT
Leader Cable EU 5 Pin 3m	Power to first fixture of run	MLCI-EU-5PIN-W-3M
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	MLCI-EU-5PIN-W-7.62M
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	MJCI-EU-5PIN-W-300MM
Jumper Cable EU 5 Pin 1m	Connection between fixtures	MJCI-EU-5PIN-W-1M
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G