


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

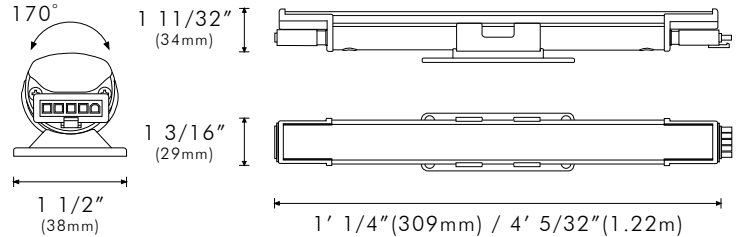

## PHYSICAL

<b>Dimensions</b>	1ft 1/4in (309mm) / 4ft 5/32in (1.22m)
<b>Weights</b>	1ft:0.38 lbs (0.17kg) / 4ft:1.22 lbs (0.55 kg)
<b>Applications</b>	Cove, Accent & Indirect General Illumination
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
<b>Ingress Protection</b>	Dry/Damp Location IP52
<b>Thermal Management</b>	Moda Aluminum Heat Sink
<b>Fixture Connections</b>	Integral Male & Female Connectors
<b>Operating Temperature</b>	-4°F ~ 149°F (-20°C ~ 65°C)
<b>Storage Temperature</b>	-13°F ~ 158°F (-25°C ~ 70°C)
<b>Humidity</b>	20-70% Non Condensing

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.		
<b>Class</b>	1		
<b>Warranty</b>	5 Year Limited Warranty		

## POWER CONSUMPTION

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
<b>1 Ft</b>	5W / 10W	6.5W / 13W	6.5W / 13W
<b>4 Ft</b>	19W / 40W	20W / 52W	20W / 52W

## OUTPUT

<b>Colors</b>	RGB27K, RGB3K, RGB35K, RGB4K
<b>Beam Angle</b>	200°
<b>Color Bin Tolerance</b>	Zero Bin
<b>Lumen Maintenance</b>	90,000 Hrs L70 @ 25°C 70,000 Hrs L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	DMX 512
<b>Power Factor</b>	≥ 0.98

## MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
<b>SO</b>	120 ft	240 ft	240 ft
<b>HO</b>	50 ft	100 ft	100 ft

## SPECIFICATIONS

	Lumens	Efficacy
<b>RGB27K 1FT</b>	210.36	35.15
<b>RGB27K 4FT</b>	841.44	43.15
<b>RGB3K 1FT</b>	256.91	42.81
<b>RGB3K 4FT</b>	1027.64	53.70
<b>RGB35K 1FT</b>	261.56	52.91
<b>RGB35K 4FT</b>	1046.24	53.65
<b>RGB4K 1FT</b>	284.74	47.45
<b>RGB4K 4FT</b>	1138.96	58.40

FIXTURE	SKU	
1 FT	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 1FT	MMCI-S-Sx-S-RGB27H-1
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 1FT	MMCI-S-Sx-S-RGB3H-1
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 1FT	MMCI-S-Sx-S-RGB35H-1
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 1FT	MMCI-S-Sx-S-RGB4H-1
4 FT	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 2700K HCRI 4FT	MMCI-S-Sx-S-RGB27H-4
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3000K HCRI 4FT	MMCI-S-Sx-S-RGB3H-4
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 3500K HCRI 4FT	MMCI-S-Sx-S-RGB35H-4
	Moda Mini Cove Interior Standard Output Silver DMX 512 RGBW 4000K HCRI 4FT	MMCI-S-Sx-S-RGB4H-4

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	MLCI-US-5PIN-W-10FT
Leader Cable US 5 Pin 25ft	Power to first fixture of run	MLCI-US-5PIN-W-25FT
Jumper Cable US 5 Pin 1ft	Connection between fixtures	MJCI-US-5PIN-W-1FT
Jumper Cable US 5 Pin 4ft	Connection between fixtures	MJCI-US-5PIN-W-4FT
Leader Cable EU 5 Pin 3m	Power to first fixture of run	MLCI-EU-5PIN-W-3M
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	MLCI-EU-5PIN-W-7.62M
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	MJCI-EU-5PIN-W-300MM
Jumper Cable EU 5 Pin 1m	Connection between fixtures	MJCI-EU-5PIN-W-1M
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G