


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

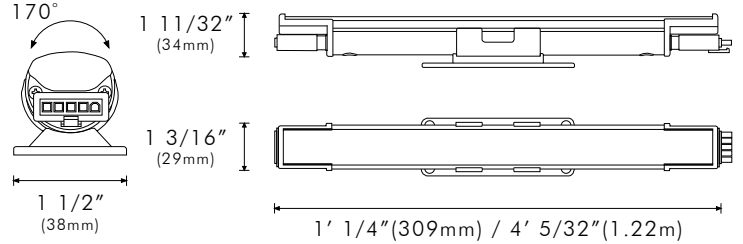

PHYSICAL

Dimensions	1ft 1/4in (309mm) / 4ft 5/32in (1.22m)
Weights	1ft: 0.21 lbs (0.10 kg) / 4ft: 0.38 lbs (0.17kg)
Applications	Cove, Accent, & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-4°F ~ 149°F (-20°C ~ 65°C)
Storage Temperature	-13°F ~ 158°F (-25°C ~ 70°C)
Humidity	20-70% Non Condensing

SPECIFICATIONS

	Lumens per ft	Efficacy(120V)	Efficacy(240V)	Efficacy(277V)
1FT SO 0-10V	294 - 728	59 - 146	45 - 112	45 - 112
1FT HO 0-10V	588 - 1400	59 - 140	45 - 108	45 - 108
4FT SO 0-10V	1176 - 2801	62 - 147	59 - 140	59 - 140
4FT HO 0-10V	2352 - 5601	59 - 140	45 - 108	45 - 108

POWER CONSUMPTION

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
1 Foot	5W / 10W	6.5W / 13W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W	20W / 52W

OUTPUT

CCTs	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle	200°
CRI	95-98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Zero Bin
Lumen Maintenance	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08
Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
SO	120 ft	240 ft	240 ft
HO	50 ft	100 ft	100 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

	FIXTURE	SKU
0-10V SO 1FT	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 1800K HCRI 1FT	MMCI-S-Sx-S-0-18H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 2200K HCRI 1FT	MMCI-S-Sx-S-0-22H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 2700K HCRI 1FT	MMCI-S-Sx-S-0-27H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 3000K HCRI 1FT	MMCI-S-Sx-S-0-3H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 3500K HCRI 1FT	MMCI-S-Sx-S-0-35H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 4000K HCRI 1FT	MMCI-S-Sx-S-0-4H-1
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 6500K HCRI 1FT	MMCI-S-Sx-S-0-65H-1
0-10V HO 1FT	Moda Mini Cove Interior High Output Silver 0-10V Dimming 1800K HCRI 1FT	MMCI-H-Sx-S-0-18H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 2200K HCRI 1FT	MMCI-H-Sx-S-0-22H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 2700K HCRI 1FT	MMCI-H-Sx-S-0-27H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 3000K HCRI 1FT	MMCI-H-Sx-S-0-3H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 3500K HCRI 1FT	MMCI-H-Sx-S-0-35H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 4000K HCRI 1FT	MMCI-H-Sx-S-0-4H-1
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 6500K HCRI 1FT	MMCI-H-Sx-S-0-65H-1
0-10V SO 4FT	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 1800K HCRI 4FT	MMCI-S-Sx-S-0-18H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 2200K HCRI 4FT	MMCI-S-Sx-S-0-22H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 2700K HCRI 4FT	MMCI-S-Sx-S-0-27H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 3000K HCRI 4FT	MMCI-S-Sx-S-0-3H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 3500K HCRI 4FT	MMCI-S-Sx-S-0-35H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 4000K HCRI 4FT	MMCI-S-Sx-S-0-4H-4
	Moda Mini Cove Interior Standard Output Silver 0-10V Dimming 6500K HCRI 4FT	MMCI-S-Sx-S-0-65H-4
0-10V HO 4FT	Moda Mini Cove Interior High Output Silver 0-10V Dimming 1800K HCRI 4FT	MMCI-H-Sx-S-0-18H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 2200K HCRI 4FT	MMCI-H-Sx-S-0-22H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 2700K HCRI 4FT	MMCI-H-Sx-S-0-27H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 3000K HCRI 4FT	MMCI-H-Sx-S-0-3H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 3500K HCRI 4FT	MMCI-H-Sx-S-0-35H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 4000K HCRI 4FT	MMCI-H-Sx-S-0-4H-4
	Moda Mini Cove Interior High Output Silver 0-10V Dimming 6500K HCRI 4FT	MMCI-H-Sx-S-0-65H-4

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 5 Pin 10ft	Power to first fixture of run	MLCI-US-5PIN-W-10FT
Leader Cable US 5 Pin 25ft	Power to first fixture of run	MLCI-US-5PIN-W-25FT
Jumper Cable US 5 Pin 1ft	Connection between fixtures	MJCI-US-5PIN-W-1FT
Jumper Cable US 5 Pin 4ft	Connection between fixtures	MJCI-US-5PIN-W-4FT
Leader Cable EU 5 Pin 3m	Power to first fixture of run	MLCI-EU-5PIN-W-3M
Leader Cable EU 5 Pin 7.62m	Power to first fixture of run	MLCI-EU-5PIN-W-7.62M
Jumper Cable EU 5 Pin 300mm	Connection between fixtures	MJCI-EU-5PIN-W-300MM
Jumper Cable EU 5 Pin 1m	Connection between fixtures	MJCI-EU-5PIN-W-1M
Terminator 5 Pin	Must be fixed to last fixture for safety	MTI-5PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G