


Client: \_\_\_\_\_ Project Name: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

SKU: \_\_\_\_\_ Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

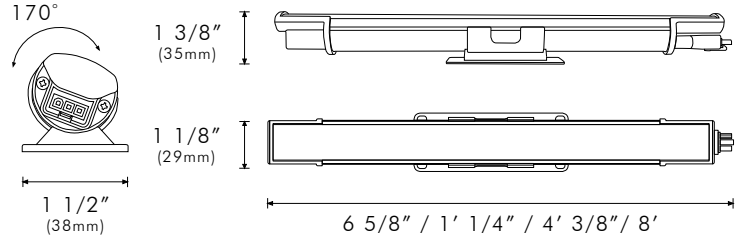

## PHYSICAL

<b>Lengths</b>	6 5/8 in (168.28mm) / 11/4 ft (311.15mm) / 4ft 3/8in (1.23m) / 8ft (2.44m)
<b>Applications</b>	Cove, Accent, & Indirect General Illumination
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
<b>Ingress Protection</b>	Dry/Damp Location IP52
<b>Thermal Management</b>	Moda Aluminum Heat Sink
<b>Fixture Connections</b>	Integral Male & Female Connectors
<b>Operating Temperature</b>	-40°F ~ 122°F (-40°C ~ 50°C)
<b>Storage Temperature</b>	-40°F ~ 176°F (-40°C ~ 80°C)
<b>Humidity</b>	0-95% Non Condensing

## SPECIFICATIONS

	Lumens per ft	Efficacy (120V)	Efficacy (277V)
6IN SO ELV	147 - 350	53 - 125	33 - 78
1FT SO ELV	294 - 728	59 - 146	45 - 112
1FT HO ELV	588 - 1400	29 - 140	23 - 108
4FT SO ELV	1176 - 1955	62 - 103	59 - 98
4FT HO ELV	2352 - 3915	59 - 98	45 - 75
8FT SO ELV	2352 - 3715	62 - 98	59 - 93
8FT HO ELV	4704 - 7430	59 - 93	45 - 71

## POWER CONSUMPTION

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
6 Inch	2.8W / N/A	4.5W / N/A	4.5W / N/A
1 Foot	5W / 10W	6.5W / 13W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W	20W / 52W
8 Foot	38W / 80W	40W / 104W	40W / 104W

## OUTPUT

<b>CCTs</b>	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
<b>Beam Angle</b>	200°
<b>CRI</b>	90 - 98
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Single Bin
<b>Lumen Maintenance</b>	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	Electronic Low Voltage Reverse Phase Trailing Edge
<b>Power Factor</b>	≥ 0.98

## MAX RUN LENGTHS

	120V AC	240V AC	277V AC
SO	120 ft	240 ft	240 ft
HO	50 ft	100 ft	100 ft

## STANDARDS & CERTIFICATIONS



<b>Certification</b>	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377- 2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
<b>Class</b>	1
<b>Warranty</b>	5 Year Limited Warranty

	FIXTURE	SKU
ELV SO 6IN	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN	MMCI-S-Sx-S-E-18H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN	MMCI-S-Sx-S-E-22H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN	MMCI-S-Sx-S-E-27H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN	MMCI-S-Sx-S-E-3H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN	MMCI-S-Sx-S-E-35H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN	MMCI-S-Sx-S-E-4H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN	MMCI-S-Sx-S-E-65H-6
ELV SO 1FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-S-Sx-S-E-18H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-S-Sx-S-E-22H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-S-Sx-S-E-27H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-S-Sx-S-E-3H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-S-Sx-S-E-35H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-S-Sx-S-E-4H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-S-Sx-S-E-65H-1
ELV HO 1FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-H-Sx-S-E-18H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-H-Sx-S-E-22H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-H-Sx-S-E-27H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-H-Sx-S-E-3H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-H-Sx-S-E-35H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-H-Sx-S-E-4H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-H-Sx-S-E-65H-1
ELV SO 4FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-S-Sx-S-E-18H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-S-Sx-S-E-22H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-S-Sx-S-E-27H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-S-Sx-S-E-3H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-S-Sx-S-E-35H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-S-Sx-S-E-4H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-S-Sx-S-E-65H-4
ELV HO 4FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-H-Sx-S-E-18H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-H-Sx-S-E-22H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-H-Sx-S-E-27H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-H-Sx-S-E-3H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-H-Sx-S-E-35H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-H-Sx-S-E-4H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-H-Sx-S-E-65H-4
ELV SO 8FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 8FT	MMCI-S-Sx-S-E-18H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 8FT	MMCI-S-Sx-S-E-22H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 8FT	MMCI-S-Sx-S-E-27H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 8FT	MMCI-S-Sx-S-E-3H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 8FT	MMCI-S-Sx-S-E-35H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 8FT	MMCI-S-Sx-S-E-4H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 8FT	MMCI-S-Sx-S-E-65H-8

	FIXTURE	SKU
ELV HO 8FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 8FT	MMCI-H-Sx-S-E-18H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 8FT	MMCI-H-Sx-S-E-22H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 8FT	MMCI-H-Sx-S-E-27H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 8FT	MMCI-H-Sx-S-E-3H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 8FT	MMCI-H-Sx-S-E-35H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 8FT	MMCI-H-Sx-S-E-4H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 8FT	MMCI-H-Sx-S-E-65H-8

## ACCESSORIES

FIXTURE	DESCRIPTION	SKU
Leader Cable US 3 Pin 10ft	Power to first fixture of run	MLCI-US-3PIN-W-10FT
Leader Cable US 3 Pin 25ft	Power to first fixture of run	MLCI-US-3PIN-W-25FT
Jumper Cable US 3 Pin 1ft	Connection between fixtures	MJCI-US-3PIN-W-1FT
Jumper Cable US 3 Pin 4ft	Connection between fixtures	MJCI-US-3PIN-W-4FT
Leader Cable EU 3 Pin 3m	Power to first fixture of run	MLCI-EU-3PIN-W-3M
Leader Cable EU 3 Pin 10m	Power to first fixture of run	MLCI-EU-3PIN-W-10M
Jumper Cable EU 3 Pin 300mm	Connection between fixtures	MJCI-EU-3PIN-W-300MM
Jumper Cable EU 3 Pin 1m	Connection between fixtures	MJCI-EU-3PIN-W-1M
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G

## CONTROLS

FIXTURE	DESCRIPTION	SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	MODA-BRIDGE-1-S2-S