


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

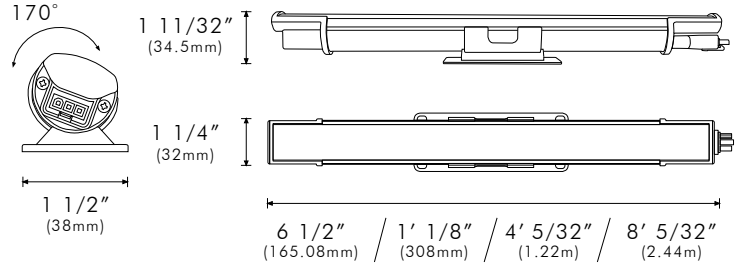

**PHYSICAL**

<b>Dimensions</b>	L: 6 1/2in (165.08mm) L: 1ft 1/8in (308mm)    W: 1 1/4in (32mm) L: 4ft 5/32in (1.22m)    H: 1 11/32in (34.5mm) L: 8ft 5/32in (2.44m)
<b>Weight</b>	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg) 4ft: 1.22 lbs (0.55 kg) / 8ft: 2.61 lbs (1.18kg)
<b>Applications</b>	Cove, Accent, & Indirect General Illumination
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens
<b>Ingress Protection</b>	Dry/Damp Location IP52
<b>Thermal Management</b>	Moda Aluminum Heat Sink
<b>Fixture Connections</b>	Integral Male & Female Connectors
<b>Operating Temperature</b>	-4°F ~ 149°F (-20°C ~ 65°C)
<b>Storage Temperature</b>	-13°F ~ 158°F (-25°C ~ 70°C)
<b>Humidity</b>	20-70% Non Condensing

**POWER CONSUMPTION**

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
6 Inch	2.8W / N/A	3.8W / N/A	4.2W / N/A
1 Foot	5W / 9.7W	5.9W / 10.1W	6.5W / 10.3W
4 Foot	18.3W / 36W	18.8W / 37.1W	19.2W / 38.2W
8 Foot	36W / 75W	37W / 76.4W	38.1W / 77.1W

**ELECTRICAL**

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	Electronic Low Voltage Reverse Phase Trailing Edge
<b>Power Factor</b>	≥ 0.98

**OUTPUT**

<b>CCTs</b>	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
<b>Beam Angle</b>	200°
<b>CRI</b>	95 - 98
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Zero Bin
<b>Lumen Maintenance</b>	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

**SPECIFICATIONS**

	Lumens	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
6IN SO ELV	147 - 350	53 - 125	38 - 92	35 - 83
1FT SO ELV	294 - 728	58 - 145	49 - 123	45 - 112
1FT HO ELV	588 - 1400	60 - 144	58 - 138	57 - 135
4FT SO ELV	1176 - 2801	64 - 153	62 - 148	61 - 145
4FT HO ELV	2352 - 3915	65 - 155	63 - 150	61 - 146
8FT SO ELV	2352 - 5601	61 - 147	58 - 140	58 - 140
8FT HO ELV	4705 - 11202	58 - 140	45 - 107	45 - 107

**MAX CONTINUOUS RUN**

	120V AC	240V AC	277V AC
SO	120 ft	240 ft	240 ft
HO	50 ft	100 ft	100 ft

**STANDARDS & CERTIFICATIONS**



**Certification** Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

<b>Class</b>	1
<b>Warranty</b>	5 Year Limited Warranty

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

	FIXTURE	SKU
ELV SO 6IN	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN	090-0001
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN	090-0003
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN	090-0005
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN	090-0006
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN	090-0008
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN	090-0009
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN	090-0014
ELV SO 1FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT	090-1001
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT	090-1003
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT	090-1005
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT	090-1006
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT	090-1008
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT	090-1009
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT	090-1014
ELV HO 1FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 1FT	090-1201
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 1FT	090-1203
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 1FT	090-1205
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 1FT	090-1206
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 1FT	090-1208
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 1FT	090-1209
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 1FT	090-1214
ELV SO 4FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT	090-3001
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT	090-3003
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT	090-3005
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT	090-3006
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT	090-3008
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT	090-3009
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT	090-3014
ELV HO 4FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 4FT	090-3201
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 4FT	090-3203
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 4FT	090-3205
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 4FT	090-3206
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 4FT	090-3208
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 4FT	090-3209
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 4FT	090-3214
ELV SO 8FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 8FT	090-5001
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 8FT	090-5003
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 8FT	090-5005
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 8FT	090-5006
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 8FT	090-5008
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 8FT	090-5009
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 8FT	090-5014

	FIXTURE	SKU
	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 8FT	090-5201
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 8FT	090-5203
ELV	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 8FT	090-5205
HO	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 8FT	090-5206
8FT	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 8FT	090-5208
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 8FT	090-5209
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 8FT	090-5214

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 3 Pin 10ft	Power to first fixture of run	299-0000
Leader Cable US 3 Pin 25ft	Power to first fixture of run	299-0002
Jumper Cable US 3 Pin 1ft	Connection between fixtures	299-1000
Jumper Cable US 3 Pin 4ft	Connection between fixtures	299-1002
Leader Cable EU 3 Pin 3m	Power to first fixture of run	299-0001
Leader Cable EU 3 Pin 7.62m	Power to first fixture of run	299-0003
Jumper Cable EU 3 Pin 300mm	Connection between fixtures	299-1001
Jumper Cable EU 3 Pin 1m	Connection between fixtures	299-1003
Terminator 3 Pin	Must be fixed to last fixture for safety	299-2000
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	299-3200

CONTROLS	DESCRIPTION	SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	250-0000