


Project Name: \_\_\_\_\_ SKU: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

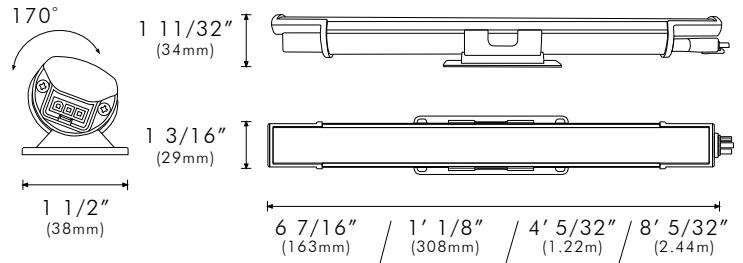

## PHYSICAL

<b>Dimension</b>	6 7/16in(163mm), 1ft 1/8in (308mm), 4ft 5/32 in(1.22m), & 8ft 5/32in (2.44m)
<b>Weight</b>	6in: 0.21 lbs (0.10 kg) / 1ft: 0.38 lbs (0.17kg)/ 4ft: 1.22 lbs (0.55 kg)/ 8ft: 2.61 lbs (1.18kg)
<b>Applications</b>	Cove, Accent, & Indirect General Illumination
<b>Construction</b>	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Polycarbonate Optical Lens
<b>Ingress Protection</b>	Dry/Damp Location IP52
<b>Thermal Management</b>	Moda Aluminum Heat Sink
<b>Fixture Connections</b>	Integral Male & Female Connectors
<b>Operating Temperature</b>	-4°F ~ 149°F (-20°C ~ 65°C)
<b>Storage Temperature</b>	-13°F ~ 158°F (-25°C ~ 70°C)
<b>Humidity</b>	20-70% Non Condensing

## POWER CONSUMPTION

	120V AC (SO/HO)	240V AC (SO/HO)	277V AC (SO/HO)
<b>6 Inch</b>	2.8W / N/A	4.5W / N/A	4.5W / N/A
<b>1 Foot</b>	5W / 10W	6.5W / 13W	6.5W / 13W
<b>4 Foot</b>	19W / 40W	20W / 52W	20W / 52W
<b>8 Foot</b>	38W / 80W	40W / 104W	40W / 104W

## ELECTRICAL

<b>Input Voltage</b>	100-277V AC 50Hz/60Hz
<b>Control</b>	Electronic Low Voltage Reverse Phase Trailing Edge
<b>Power Factor</b>	≥ 0.98

## OUTPUT

<b>CCTs</b>	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
<b>Beam Angle</b>	200°
<b>CRI</b>	95 - 98
<b>SDCM</b>	2-Step MacAdam Ellipse
<b>Color Bin Tolerance</b>	Zero Bin
<b>Lumen Maintenance</b>	90,000 Hours L70 @ 25°C 70,000 Hours L70 @ 50°C
<b>Testing Data</b>	Light Data LM-79-08 & LM-80-08

## SPECIFICATIONS

	Lumens/ft	Efficacy (120V)	Efficacy (240V)	Efficacy (277V)
<b>6IN SO ELV</b>	147 - 350	53 - 125	33 - 78	33 - 78
<b>1FT SO ELV</b>	294 - 728	59 - 146	45 - 112	45 - 112
<b>1FT HO ELV</b>	588 - 1400	59 - 140	45 - 108	45 - 108
<b>4FT SO ELV</b>	1176 - 2801	62 - 147	59 - 140	59 - 140
<b>4FT HO ELV</b>	2352 - 3915	59 - 140	45 - 108	45 - 108
<b>8FT SO ELV</b>	2352 - 5601	62 - 147	59 - 140	59 - 140
<b>8FT HO ELV</b>	4705 - 11202	59 - 140	59 - 140	45 - 107

## MAX CONTINUOUS RUN

	120V AC	240V AC	277V AC
<b>SO</b>	120 ft	240 ft	240 ft
<b>HO</b>	50 ft	100 ft	100 ft

## STANDARDS & CERTIFICATIONS



**Certification** Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

<b>Class</b>	1
<b>Warranty</b>	5 Year Limited Warranty

	FIXTURE	SKU
ELV SO 6IN	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN	MMCI-S-Sx-S-E-18H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN	MMCI-S-Sx-S-E-22H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN	MMCI-S-Sx-S-E-27H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN	MMCI-S-Sx-S-E-3H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN	MMCI-S-Sx-S-E-35H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN	MMCI-S-Sx-S-E-4H-6
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN	MMCI-S-Sx-S-E-65H-6
ELV SO 1FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-S-Sx-S-E-18H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-S-Sx-S-E-22H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-S-Sx-S-E-27H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-S-Sx-S-E-3H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-S-Sx-S-E-35H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-S-Sx-S-E-4H-1
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-S-Sx-S-E-65H-1
ELV HO 1FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 1FT	MMCI-H-Sx-S-E-18H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 1FT	MMCI-H-Sx-S-E-22H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 1FT	MMCI-H-Sx-S-E-27H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 1FT	MMCI-H-Sx-S-E-3H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 1FT	MMCI-H-Sx-S-E-35H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 1FT	MMCI-H-Sx-S-E-4H-1
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 1FT	MMCI-H-Sx-S-E-65H-1
ELV SO 4FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-S-Sx-S-E-18H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-S-Sx-S-E-22H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-S-Sx-S-E-27H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-S-Sx-S-E-3H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-S-Sx-S-E-35H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-S-Sx-S-E-4H-4
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-S-Sx-S-E-65H-4
ELV HO 4FT	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 4FT	MMCI-H-Sx-S-E-18H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 4FT	MMCI-H-Sx-S-E-22H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 4FT	MMCI-H-Sx-S-E-27H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 4FT	MMCI-H-Sx-S-E-3H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 4FT	MMCI-H-Sx-S-E-35H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 4FT	MMCI-H-Sx-S-E-4H-4
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 4FT	MMCI-H-Sx-S-E-65H-4
ELV SO 8FT	Moda Mini Cove Interior Standard Output Silver ELV Dimming 1800K HCRI 8FT	MMCI-S-Sx-S-E-18H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2200K HCRI 8FT	MMCI-S-Sx-S-E-22H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 2700K HCRI 8FT	MMCI-S-Sx-S-E-27H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3000K HCRI 8FT	MMCI-S-Sx-S-E-3H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 3500K HCRI 8FT	MMCI-S-Sx-S-E-35H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 4000K HCRI 8FT	MMCI-S-Sx-S-E-4H-8
	Moda Mini Cove Interior Standard Output Silver ELV Dimming 6500K HCRI 8FT	MMCI-S-Sx-S-E-65H-8

	FIXTURE	SKU
	Moda Mini Cove Interior High Output Silver ELV Dimming 1800K HCRI 8FT	MMCI-H-Sx-S-E-18H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 2200K HCRI 8FT	MMCI-H-Sx-S-E-22H-8
ELV	Moda Mini Cove Interior High Output Silver ELV Dimming 2700K HCRI 8FT	MMCI-H-Sx-S-E-27H-8
HO	Moda Mini Cove Interior High Output Silver ELV Dimming 3000K HCRI 8FT	MMCI-H-Sx-S-E-3H-8
8FT	Moda Mini Cove Interior High Output Silver ELV Dimming 3500K HCRI 8FT	MMCI-H-Sx-S-E-35H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 4000K HCRI 8FT	MMCI-H-Sx-S-E-4H-8
	Moda Mini Cove Interior High Output Silver ELV Dimming 6500K HCRI 8FT	MMCI-H-Sx-S-E-65H-8

ACCESSORIES	DESCRIPTION	SKU
Leader Cable US 3 Pin 10ft	Power to first fixture of run	MLCI-US-3PIN-W-10FT
Leader Cable US 3 Pin 25ft	Power to first fixture of run	MLCI-US-3PIN-W-25FT
Jumper Cable US 3 Pin 1ft	Connection between fixtures	MJCI-US-3PIN-W-1FT
Jumper Cable US 3 Pin 4ft	Connection between fixtures	MJCI-US-3PIN-W-4FT
Leader Cable EU 3 Pin 3m	Power to first fixture of run	MLCI-EU-3PIN-W-3M
Leader Cable EU 3 Pin 7.62m	Power to first fixture of run	MLCI-EU-3PIN-W-7.62M
Jumper Cable EU 3 Pin 300mm	Connection between fixtures	MJCI-EU-3PIN-W-300MM
Jumper Cable EU 3 Pin 1m	Connection between fixtures	MJCI-EU-3PIN-W-1M
Terminator 3 Pin	Must be fixed to last fixture for safety	MTI-3PIN-W
Mounting Track	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.	MMC-20-TRACK-1-S1-G

CONTROLS	DESCRIPTION	SKU
Bridge 1 US	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model	250-0000