


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

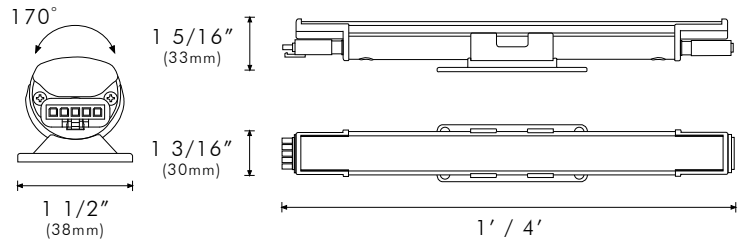

PHYSICAL

Lengths	1ft (304mm) / 4ft (1.22m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

SPECIFICATIONS

	Lumens	Efficacy
1FT 0-10V	429.50	99.88
4FT 0-10V	1718.01	98.17

POWER CONSUMPTION

	120V AC	277V AC
1 Foot	5W	6.5W
4 Foot	19W	20W

OUTPUT

CCTs	2700K to 1800K 3500K to 2200K
Beam Angle	30° x 100°
CRI	98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

MAX RUN LENGTHS

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

	NAME	SKU
0-10V 1FT	Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 1FT	MMCI-S-Sx-S-0-GD-1-310
	Moda Mini Graze Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 1FT	137-1025-xx
0-10V 4FT	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 2700K-1800K HCRI 4FT	MMCI-S-Sx-S-0-GD-4-310
	Moda Mini Cove Interior Glowdim Standard Output Silver 0-10V Dimming 3500K-2200K HCRI 4FT	137-3025-xx

ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.