


Project Name: _____ SKU: _____

MODA Contact: _____ E-Mail: _____

Type: _____ PO#: _____ Quantity: _____

Notes: _____

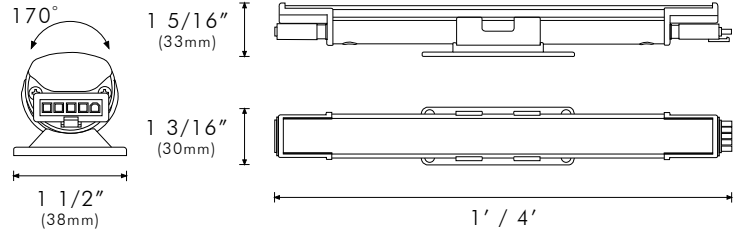

PHYSICAL

Lengths	1ft (304mm) / 4ft (1.22m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

SPECIFICATIONS

	Lumens	Efficacy (120V)	Efficacy (277V)
1FT SO 0-10V	306 - 728	61 - 146	47 - 112
1FT HO 0-10V	612 - 1456	61 - 146	47 - 112
4FT SO 0-10V	1223 - 2912	64 - 153	61 - 146
4FT HO 0-10V	2446 - 5824	61 - 146	47 - 112

POWER CONSUMPTION

	120V AC (SO/HO)	277V AC (SO/HO)
1 Foot	5W / 10W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W

OUTPUT

CCTs	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle	30° x 100°
CRI	90 - 98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

MAX RUN LENGTHS

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

	NAME	SKU
0-10V SO 1FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 1800K HCRI 1FT	MMGI-S-Sx-S-0-18H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2200K HCRI 1FT	MMGI-S-Sx-S-0-22H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2700K HCRI 1FT	MMGI-S-Sx-S-0-27H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3000K HCRI 1FT	MMGI-S-Sx-S-0-3H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3500K HCRI 1FT	MMGI-S-Sx-S-0-35H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 4000K HCRI 1FT	MMGI-S-Sx-S-0-4H-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 6500K HCRI 1FT	MMGI-S-Sx-S-0-65H-1
0-10V HO 1FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming 1800K HCRI 1FT	MMGI-H-Sx-S-0-18H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2200K HCRI 1FT	MMGI-H-Sx-S-0-22H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2700K HCRI 1FT	MMGI-H-Sx-S-0-27H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3000K HCRI 1FT	MMGI-H-Sx-S-0-3H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3500K HCRI 1FT	MMGI-H-Sx-S-0-35H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 4000K HCRI 1FT	MMGI-H-Sx-S-0-4H-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 6500K HCRI 1FT	MMGI-H-Sx-S-0-65H-1
0-10V SO 4FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 1800K HCRI 4FT	MMGI-S-Sx-S-0-18H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2200K HCRI 4FT	MMGI-S-Sx-S-0-22H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 2700K HCRI 4FT	MMGI-S-Sx-S-0-27H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3000K HCRI 4FT	MMGI-S-Sx-S-0-3H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 3500K HCRI 4FT	MMGI-S-Sx-S-0-35H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 4000K HCRI 4FT	MMGI-S-Sx-S-0-4H-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming 6500K HCRI 4FT	MMGI-S-Sx-S-0-65H-4
0-10V HO 4FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming 1800K HCRI 4FT	MMGI-H-Sx-S-0-18H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 1800K HCRI 4FT	MMGI-H-Sx-S-0-22H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2200K HCRI 4FT	MMGI-H-Sx-S-0-27H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 2700K HCRI 4FT	MMGI-H-Sx-S-0-3H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3000K HCRI 4FT	MMGI-H-Sx-S-0-35H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 3500K HCRI 4FT	MMGI-H-Sx-S-0-4H-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming 4000K HCRI 4FT	MMGI-H-Sx-S-0-65H-4

ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.