


Client: _____ Project Name: _____

MODA Contact: _____ E-Mail: _____

SKU: _____ Type: _____ PO#: _____ Quantity: _____

Notes: _____

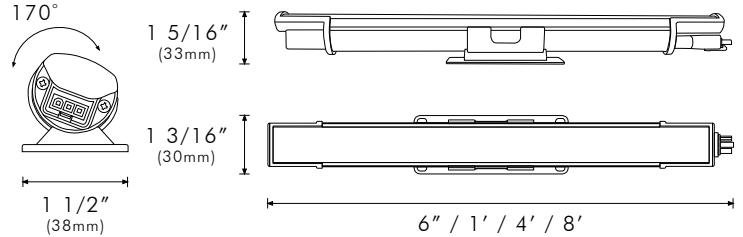

PHYSICAL

Lengths	6in* (158.70mm) / 1ft (304mm) / 4ft (1.22m) / 8ft (2.44m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

SPECIFICATIONS

	Lumens	Efficacy (120V)	Efficacy (277V)
6IN SO ELV	153 - 364	55 - 130	34 - 81
1FT SO ELV	306 - 728	61 - 146	47 - 112
1FT HO ELV	612 - 1456	61 - 146	47 - 112
4FT SO ELV	1223 - 2912	64 - 153	61 - 146
4FT HO ELV	2446 - 5824	61 - 146	47 - 112
8FT SO ELV	2446 - 5824	64 - 153	61 - 146
8FT HO ELV	4892 - 11648	61 - 146	47 - 112

POWER CONSUMPTION

	120V AC (SO/HO)	277V AC (SO/HO)
6 Inch	2.8W / N/A	4.5W / N/A
1 Foot	5W / 10W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W
8 Foot	38W / 80W	40W / 104W

OUTPUT

CCTs	1800K, 2200K, 2700K, 3000K, 3500K, 4000K, 6500K
Beam Angle	30° x 100°
CRI	90 - 98
SDCM	2-Step MacAdam Ellipse
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

ELECTRICAL

Input Voltage	100-277V AC 50Hz/60Hz
Control	Electronic Low Voltage Reverse Phase Trailing Edge
Power Factor	≥ 0.98

MAX RUN LENGTHS

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

STANDARDS & CERTIFICATIONS



Certification	Tested to UL & CSA by Intertek For Use in USA & CANADA. Exceeds ANSI C78.377- 2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.
Class	1
Warranty	5 Year Limited Warranty

*NOTES

- * 6 inch available only in SO
- * For 0-10V dimming use Moda Bridge 1 accessory.

	NAME	SKU
ELV SO 6IN	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 6IN	MMGI-S-Sx-S-E-18H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 6IN	MMGI-S-Sx-S-E-22H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 6IN	MMGI-S-Sx-S-E-27H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 6IN	MMGI-S-Sx-S-E-3H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 6IN	MMGI-S-Sx-S-E-35H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 6IN	MMGI-S-Sx-S-E-4H-6
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 6IN	MMGI-S-Sx-S-E-65H-6
ELV SO 1FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 1FT	MMGI-S-Sx-S-E-18H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 1FT	MMGI-S-Sx-S-E-22H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 1FT	MMGI-S-Sx-S-E-27H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 1FT	MMGI-S-Sx-S-E-3H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 1FT	MMGI-S-Sx-S-E-35H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 1FT	MMGI-S-Sx-S-E-4H-1
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 1FT	MMGI-S-Sx-S-E-65H-1
ELV HO 1FT	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 1FT	MMGI-H-Sx-S-E-18H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 1FT	MMGI-H-Sx-S-E-22H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 1FT	MMGI-H-Sx-S-E-27H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 1FT	MMGI-H-Sx-S-E-3H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 1FT	MMGI-H-Sx-S-E-35H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 1FT	MMGI-H-Sx-S-E-4H-1
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 1FT	MMGI-H-Sx-S-E-65H-1
ELV SO 4FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 4FT	MMGI-S-Sx-S-E-18H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 4FT	MMGI-S-Sx-S-E-22H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 4FT	MMGI-S-Sx-S-E-27H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 4FT	MMGI-S-Sx-S-E-3H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 4FT	MMGI-S-Sx-S-E-35H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 4FT	MMGI-S-Sx-S-E-4H-4
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 4FT	MMGI-S-Sx-S-E-65H-4
ELV HO 4FT	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 4FT	MMGI-H-Sx-S-E-18H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 4FT	MMGI-H-Sx-S-E-22H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 4FT	MMGI-H-Sx-S-E-27H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 4FT	MMGI-H-Sx-S-E-3H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 4FT	MMGI-H-Sx-S-E-35H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 4FT	MMGI-H-Sx-S-E-4H-4
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 4FT	MMGI-H-Sx-S-E-65H-4
ELV SO 8FT	Moda Mini Graze Interior Standard Output Silver ELV Dimming 1800K HCRI 8FT	MMGI-S-Sx-S-E-18H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2200K HCRI 8FT	MMGI-S-Sx-S-E-22H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 2700K HCRI 8FT	MMGI-S-Sx-S-E-27H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3000K HCRI 8FT	MMGI-S-Sx-S-E-3H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 3500K HCRI 8FT	MMGI-S-Sx-S-E-35H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 4000K HCRI 8FT	MMGI-S-Sx-S-E-4H-8
	Moda Mini Graze Interior Standard Output Silver ELV Dimming 6500K HCRI 8FT	MMGI-S-Sx-S-E-65H-8

	NAME	SKU
	Moda Mini Graze Interior High Output Silver ELV Dimming 1800K HCRI 8FT	MMGI-H-Sx-S-E-18H-8
	Moda Mini Graze Interior High Output Silver ELV Dimming 2200K HCRI 8FT	MMGI-H-Sx-S-E-22H-8
ELV HO 8FT	Moda Mini Graze Interior High Output Silver ELV Dimming 2700K HCRI 8FT	MMGI-H-Sx-S-E-27H-8
	Moda Mini Graze Interior High Output Silver ELV Dimming 3000K HCRI 8FT	MMGI-H-Sx-S-E-3H-8
	Moda Mini Graze Interior High Output Silver ELV Dimming 3500K HCRI 8FT	MMGI-H-Sx-S-E-35H-8
	Moda Mini Graze Interior High Output Silver ELV Dimming 4000K HCRI 8FT	MMGI-H-Sx-S-E-4H-8
	Moda Mini Graze Interior High Output Silver ELV Dimming 6500K HCRI 8FT	MMGI-H-Sx-S-E-65H-8

ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 3 Pin 10ft	MLCI-US-3PIN-W-10FT	Power to first fixture of run
Leader Cable US 3 Pin 25ft	MLCI-US-3PIN-W-25FT	Power to first fixture of run
Jumper Cable US 3 Pin 1ft	MJCI-US-3PIN-W-1FT	Connection between fixtures
Jumper Cable US 3 Pin 4ft	MJCI-US-3PIN-W-4FT	Connection between fixtures
Leader Cable EU 3 Pin 3m	MLCI-EU-3PIN-W-3M	Power to first fixture of run
Leader Cable EU 3 Pin 10m	MLCI-EU-3PIN-W-10M	Power to first fixture of run
Jumper Cable EU 3 Pin 300mm	MJCI-EU-3PIN-W-300MM	Connection between fixtures
Jumper Cable EU 3 Pin 1m	MJCI-EU-3PIN-W-1M	Connection between fixtures
Terminator 3 Pin	MTI-3PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.

CONTROLS

NAME	SKU	DESCRIPTION
Bridge 1 US	250-0000-01	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. North American Model
Bridge 1 EU	250-0001-01	Allows user to convert a 0-10V dimming signal into an ELV dimming signal. European Model