


## SPECIFICATION

### Dimmable Low Profile LED Linear Flex System:

MINI STARFLEX is the thinnest flexible linear product. Designed to deliver a large amount of light in an incredibly small package while still maintaining the high performance and quality as the rest of the STARFLEX family. MINI STARFLEX is field cuttable every 1 inch and comes complete with 3M backing for easy installation. No UV or IR. Dimmable with choice of MODA drivers. See MODA Metal® for extrusion options.



### Dimensions:

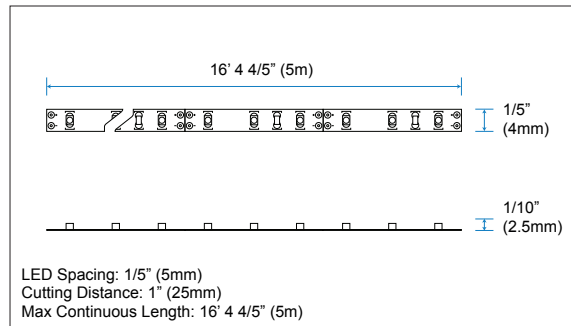


### Output:

Delivered Lumens	178.23 lm / ft
CCT	3500k
Chromaticity Ordinates	x: 0.4141 y: 0.4008 u: 0.2373 v: 0.3444
Color Bin Tolerance	+ 3% / - 3%
Efficacy (lm/w)	86.10
CRI	82
Lumen Maintenance	70,000 Hours L70 @ 25°C : 90,000 Hours L50 @ 25°C 50,000 Hours L70 @ 50°C : 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

### Illuminance at a Distance: Data Shown for 120°

(For lux multiply fc by 10.7)

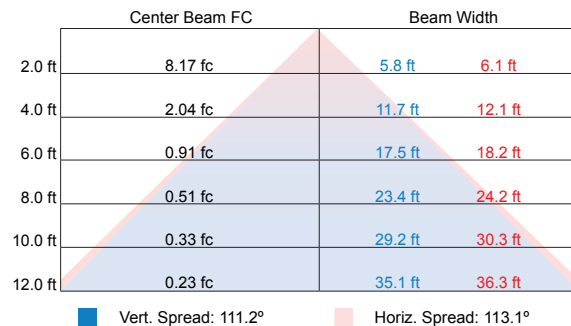


### Electrical:

Input Voltage	12v DC
Power Consumption	2.07w / ft (0.17A) - Varies based on length of run & driver
Power Factor	≤ 1
Dimming	100-277v 0-10v & Magnetic Low Voltage
Emergency	N/A

### Polar Candela Distribution:

Data Shown for 120°



### Lumens per Zone:

Zone	Lumens	% Total
0-10	5.86	3.29%
10-20	16.82	9.44%
20-30	25.56	14.34%
30-40	30.89	17.33%
40-50	32.12	18.02%
50-60	29.03	16.29%
60-70	21.90	12.29%
70-80	12.12	6.80%
80-90	3.89	2.18%
90-100	0.00	0.00%

### Physical:

Applications	Cabinet, Cove, Display, Niches, Perimeter Lighting
Dimensions	Length 16' 4 4/5" (5m) Width 1/5" (4mm) Height 1/10" (2.5mm)
Weight	3.9 oz (110g) Per Reel
Construction	Constant Voltage Design Protects LEDs And Prolongs Life. White FPCB
Thermal Management	N/A
Optics	N/A
Fixture Connections	Solder Connectors
Operating Temperature	-22°F ~ 122°F (-30°C ~ 70°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

Project Name:			
Notes:			

# SPECIFICATION


## Zonal Lumen Summary:

Zone	Lumens	% Lamp	% Fixt
0-30	48.30	N.A.	27.10%
0-40	79.13	N.A.	44.40%
0-60	140.27	N.A.	78.70%
60-90	34.04	N.A.	19.10%
0-90	178.23	N.A.	100%
90-180	0.00	N.A.	0.00%
0-180	178.23	N.A.	100%


## Luminance Data (cd/sq.m):

Angle in Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	34785	35626	35804
55	33508	34187	34486
65	31103	31915	32051
75	25195	26256	26477
85	24677	25202	25334


## CIE 1931 Chromaticity Diagram:

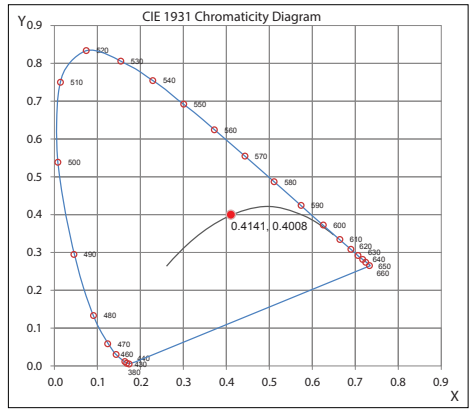

## Spectral Power:

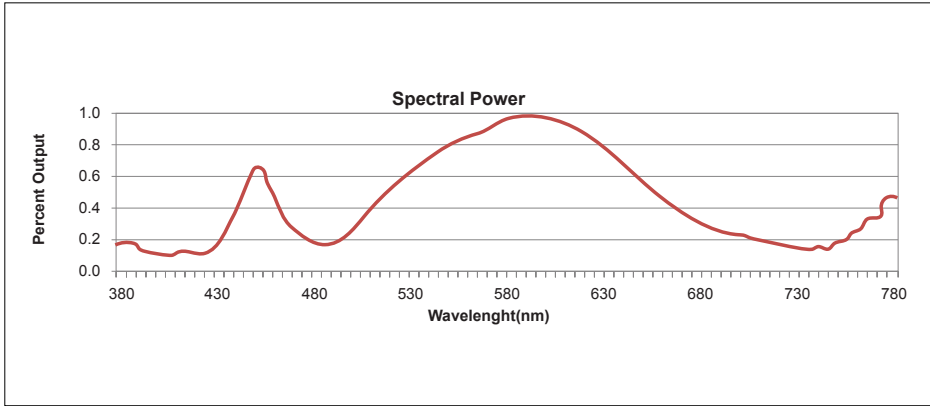

## Polar Graph: Data Shown for 120°

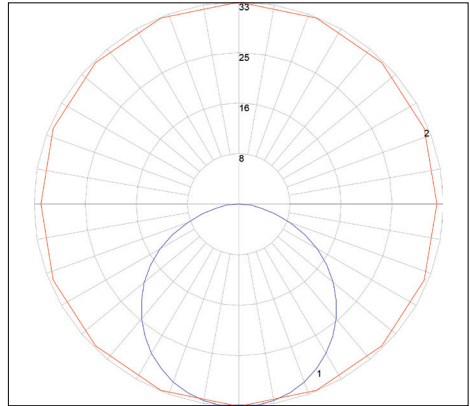


## Standards and Certifications:





Certification	Tested to UL & CSA by ETL For Use in USA & CANADA, Complies with California Title 24 Requirements, Lighting Facts. Exceeds ANSI C78.377A, CE & RoHS Compliant.
Class	Class 3
Environment	Dry Location - IP20
Warranty	5 Year Limited Warranty

## Ordering:

SKU:	MINI-STARFLEX-3500K
------	---------------------

### SPECIFICATION

Non Dimming		Voltage Range	Wattage	IP Rating	Dimension
MP16		100-277v AC	132w	IP67	8 7/10" x 2 7/10" x 1 1/2" (222mm x 68mm x 39mm)

0-10v Dimming		Voltage Range	Wattage	IP Rating	Dimension
MP05		347v AC	60w	IP66	9 2/5" x 1 7/10" x 1 3/10" (240mm x 43mm x 32mm)
MP18N		100-277v AC	60w	IP66	9 2/5" x 1 7/10" x 1 3/10" (240mm x 43mm x 32mm)
MP86		100-277v AC	100w	IP66	9 1/2" x 2 3/10" x 1 1/2" (241mm x 58mm x 37mm)
MP88		100-277v AC	150w	IP66	9 1/2" x 2 3/5" x 1 3/5" (241mm x 67mm x 40.5mm)

#### Ordering:

Sample SKU: MP05