


Client: \_\_\_\_\_ Project Name: \_\_\_\_\_

MODA Contact: \_\_\_\_\_ E-Mail: \_\_\_\_\_

SKU: \_\_\_\_\_ Type: \_\_\_\_\_ PO#: \_\_\_\_\_ Quantity: \_\_\_\_\_

Notes: \_\_\_\_\_

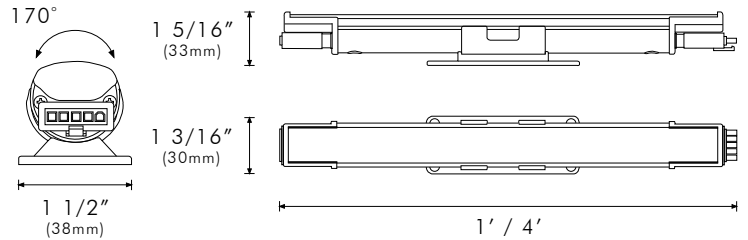

**PHYSICAL**

Lengths	1ft (304mm) / 4ft (1.22m)
Applications	Graze, Accent & Indirect General Illumination
Construction	6063 Aluminum Body, Polycarbonate Self-Locking Mounting Bracket and Optical Lens
Ingress Protection	Dry/Damp Location IP52
Thermal Management	Moda Aluminum Heat Sink
Fixture Connections	Integral Male & Female Connectors
Operating Temperature	-40°F ~ 122°F (-40°C ~ 50°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 80°C)
Humidity	0-95% Non Condensing

**SPECIFICATIONS**

	Lumens per ft	Efficacy per ft (120V)	Efficacy per ft (277V)
RED SO/HO	161 - 323	32	26
GREEN SO/HO	188 - 379	38	29
BLUE SO/HO	134 - 275	27	21
AMBER SO/HO	225 - 445	45	35
YELLOW SO/HO	206 - 413	41	32
GOLDEN YELLOW SO/HO	489 - 974	98	75
ICE BLUE SO/HO	412 - 824	82	63
CYAN SO/HO	162 - 324	32	25
LIGHT GREEN SO/HO	470 - 941	94	72
PINK SO/HO	198 - 386	40	30
VIOLET SO/HO	186 - 372	37	29
TURQUOISE SO/HO	161 - 327	32	25
DARK BLUE SO/HO	81 - 161	16	12
DARK ORANGE SO/HO	403 - 806	81	62

**OUTPUT**

Colors	Red, Green, Blue, Amber, Yellow, Golden Yellow, Ice Blue, Cyan, Light Green, Pink, Violet, Turquoise, Dark Blue, Dark Orange
Beam Angle	30° x 100°
Color Bin Tolerance	Single Bin
Lumen Maintenance	90,000 Hours L50 @ 25°C 70,000 Hours L50 @ 50°C
Testing Data	Light Data LM-79-08 & LM-80-08

**ELECTRICAL**

Input Voltage	100-277V AC 50Hz/60Hz
Control	0-10V
Power Factor	≥ 0.98

**MAX RUN LENGTHS**

	120V AC	277V AC
SO	120 ft	240 ft
HO	50 ft	100 ft

**POWER CONSUMPTION**

	120V AC (SO/HO)	277V AC (SO/HO)
1 Foot	5W / 10W	6.5W / 13W
4 Foot	19W / 40W	20W / 52W

**STANDARDS & CERTIFICATIONS**



Tested to UL & CSA by Intertek For Use in USA & CANADA.  
**Certification** Exceeds ANSI C78.377-2015, CE, CCC, C-Tick, RoHS, & WEEE Compliant.

Class	1
Warranty	5 Year Limited Warranty

Due to continuous improvements and innovations, specifications may change without notice. Please refer to our website for current technical data. These figures are provided as a guideline only and may vary with differing power supplies and installations. All rights reserved. E&OE.

	NAME	SKU
0-10V SO 1FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Red 1FT	MMGI-S-Sx-S-0-R-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Green 1FT	MMGI-S-Sx-S-0-G-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Blue 1FT	MMGI-S-Sx-S-0-B-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Amber 1FT	MMGI-S-Sx-S-0-A-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Yellow 1FT	MMGI-S-Sx-S-0-Y-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Golden Yellow 1FT	MMGI-S-Sx-S-0-GY-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Ice Blue 1FT	MMGI-S-Sx-S-0-IB-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Cyan 1FT	MMGI-S-Sx-S-0-C-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Light Green 1FT	MMGI-S-Sx-S-0-LG-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Pink 1FT	MMGI-S-Sx-S-0-P-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Violet 1FT	MMGI-S-Sx-S-0-V-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Turquoise 1FT	MMGI-S-Sx-S-0-TQ-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Blue 1FT	MMGI-S-Sx-S-0-DB-1
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Orange 1FT	MMGI-S-Sx-S-0-DO-1
0-10V HO 1FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming Red 1FT	MMGI-H-Sx-S-0-R-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Green 1FT	MMGI-H-Sx-S-0-G-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Blue 1FT	MMGI-H-Sx-S-0-B-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Amber 1FT	MMGI-H-Sx-S-0-A-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Yellow 1FT	MMGI-H-Sx-S-0-Y-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Golden Yellow 1FT	MMGI-H-Sx-S-0-GY-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Ice Blue 1FT	MMGI-H-Sx-S-0-IB-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Cyan 1FT	MMGI-H-Sx-S-0-C-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Light Green 1FT	MMGI-H-Sx-S-0-LG-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Pink 1FT	MMGI-H-Sx-S-0-P-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Violet 1FT	MMGI-H-Sx-S-0-V-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Turquoise 1FT	MMGI-H-Sx-S-0-TQ-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Blue 1FT	MMGI-H-Sx-S-0-DB-1
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Orange 1FT	MMGI-H-Sx-S-0-DO-1
0-10V SO 4FT	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Red 4FT	MMGI-S-Sx-S-0-R-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Green 4FT	MMGI-S-Sx-S-0-G-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Blue 4FT	MMGI-S-Sx-S-0-B-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Amber 4FT	MMGI-S-Sx-S-0-A-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Yellow 4FT	MMGI-S-Sx-S-0-Y-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Golden Yellow 4FT	MMGI-S-Sx-S-0-GY-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Ice Blue 4FT	MMGI-S-Sx-S-0-IB-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Cyan 4FT	MMGI-S-Sx-S-0-C-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Light Green 4FT	MMGI-S-Sx-S-0-LG-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Pink 4FT	MMGI-S-Sx-S-0-P-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Violet 4FT	MMGI-S-Sx-S-0-V-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Turquoise 4FT	MMGI-S-Sx-S-0-TQ-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Blue 4FT	MMGI-S-Sx-S-0-DB-4
	Moda Mini Graze Interior Standard Output Silver 0-10V Dimming Dark Orange 4FT	MMGI-S-Sx-S-0-DO-4

	NAME	SKU
0-10V HO 4FT	Moda Mini Graze Interior High Output Silver 0-10V Dimming Red 4FT	MMGI-H-Sx-S-0-R-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Green 4FT	MMGI-H-Sx-S-0-G-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Blue 4FT	MMGI-H-Sx-S-0-B-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Amber 4FT	MMGI-H-Sx-S-0-A-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Yellow 4FT	MMGI-H-Sx-S-0-Y-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Golden Yellow 4FT	MMGI-H-Sx-S-0-GY-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Ice Blue 4FT	MMGI-H-Sx-S-0-IB-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Cyan 4FT	MMGI-H-Sx-S-0-C-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Light Green 4FT	MMGI-H-Sx-S-0-LG-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Pink 4FT	MMGI-H-Sx-S-0-P-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Violet 4FT	MMGI-H-Sx-S-0-V-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Turquoise 4FT	MMGI-H-Sx-S-0-TQ-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Blue 4FT	MMGI-H-Sx-S-0-DB-4
	Moda Mini Graze Interior High Output Silver 0-10V Dimming Dark Orange 4FT	MMGI-H-Sx-S-0-DO-4

## ACCESSORIES

NAME	SKU	DESCRIPTION
Leader Cable US 5 Pin 10ft	MLCI-US-5PIN-W-10FT	Power to first fixture of run
Leader Cable US 5 Pin 25ft	MLCI-US-5PIN-W-25FT	Power to first fixture of run
Jumper Cable US 5 Pin 1ft	MJCI-US-5PIN-W-1FT	Connection between fixtures
Jumper Cable US 5 Pin 4ft	MJCI-US-5PIN-W-4FT	Connection between fixtures
Leader Cable EU 5 Pin 3m	MLCI-EU-5PIN-W-3M	Power to first fixture of run
Leader Cable EU 5 Pin 10m	MLCI-EU-5PIN-W-10M	Power to first fixture of run
Jumper Cable EU 5 Pin 300mm	MJCI-EU-5PIN-W-300MM	Connection between fixtures
Jumper Cable EU 5 Pin 1m	MJCI-EU-5PIN-W-1M	Connection between fixtures
Terminator 5 Pin	MTI-5PIN-W	Must be fixed to last fixture for safety
Mounting Track	MMC-20-TRACK-1-S1-G	Allows user to install fixtures in a continuous linear position. Packaged in 5 4ft sections in total of 20ft.